

# Forenta

Morristown, TN U.S.A.

## Laundry Apparel Press

Models A and AT51VL/VLE

Models A and AT53VL/VLE



A51VL/VLE



AT51VL/VLE

- Insulated Head Cover and Nickel-Plated Head Reduces Heat Loss, Saves Energy
- Designed for Finishing Pants, Jackets, Pant Tops and All Wearing Apparel
- A Model Uses Control Bar Operation
- AT Models Use Two-Button Operation
- Available in Steam or Electric Models

A53VL/VLE




AT53VL/VLE



# Specifications

Models A~ATA51VL / VLE, A~ATA53VL / VLE

Electrical connections		A51VL ATA51VL	A51VLE ATA51VLE	A53VL ATA53VL	A53VLE ATA53VLE
Voltage: 230V 1PH 50/60Hz		—	×	—	×
WATTAGE		—	4800W.	—	7400W.
Approx. Consumption/Hour		—	2.4 KWH	—	3.75 KWH
Steam and Air connection					
Steam Inlet	NPT	1/2"	—	1/2"	—
Steam Outlet	NPT	1/2"	—	1/2"	—
Rec. steam pressure	PSIG	100-125	—	100-125	—
	kPa	621-861	—	621-861	—
Steam consumption	BHP	1	—	1	—
	kg/hr	15.6	—	15.6	—
Compressed air	NPT	3/8"	3/8"	3/8"	3/8"
Air consumption	free air/cycle at 68psig	0.31 CU.FT.	0.31 CU.FT.	0.31 CU.FT.	0.31 CU.FT.
	free air/cycle at 470kPa	8.8 liters	8.8 liters	8.8 liters	8.8 liters
Rec. air pressure	PSIG	68	68	68	68
	kPa	470	470	470	470
Weight (crated)					
Shipping	lbs	910	910	940	940
	kg	413	413	426	426
Dimensions					
B (table width)		60"(1524)	60"(1524)	60"(1524)	60"(1524)
C (overall width)	A-Series	61"(1549)	61"(1549)	61"(1549)	61"(1549)
	ATA-Series	60"(1524)	60"(1524)	60"(1524)	60"(1524)
D	A-Series	34 1/2"(876)	34 1/2"(876)	34 1/2"(876)	34 1/2"(876)
	ATA-Series	34"(864)	34"(864)	34"(864)	34"(864)
1 Control bar ~for A-Series only 2 Control Push Buttons ~for ATA-Series only 3 Steam connection ~for steam heated models only 4 Air connection 5 Steam Outlet connection ~for steam heated models only 6 Electrical connection ~for electric heated models only					

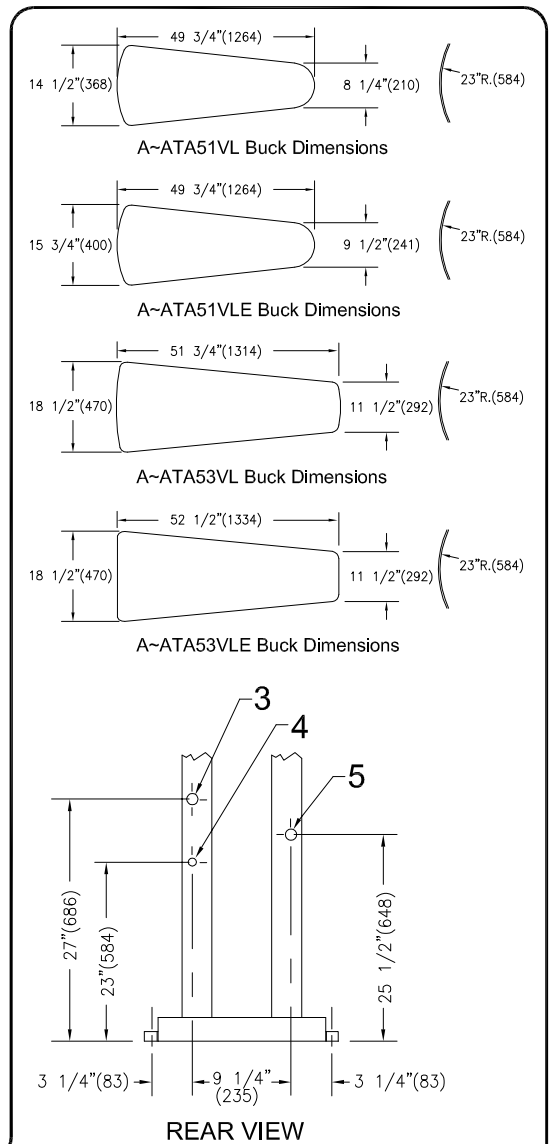

## Detail Line Drawing (millimeters shown in parentheses)

