




END LOADER

Washer/Extractor

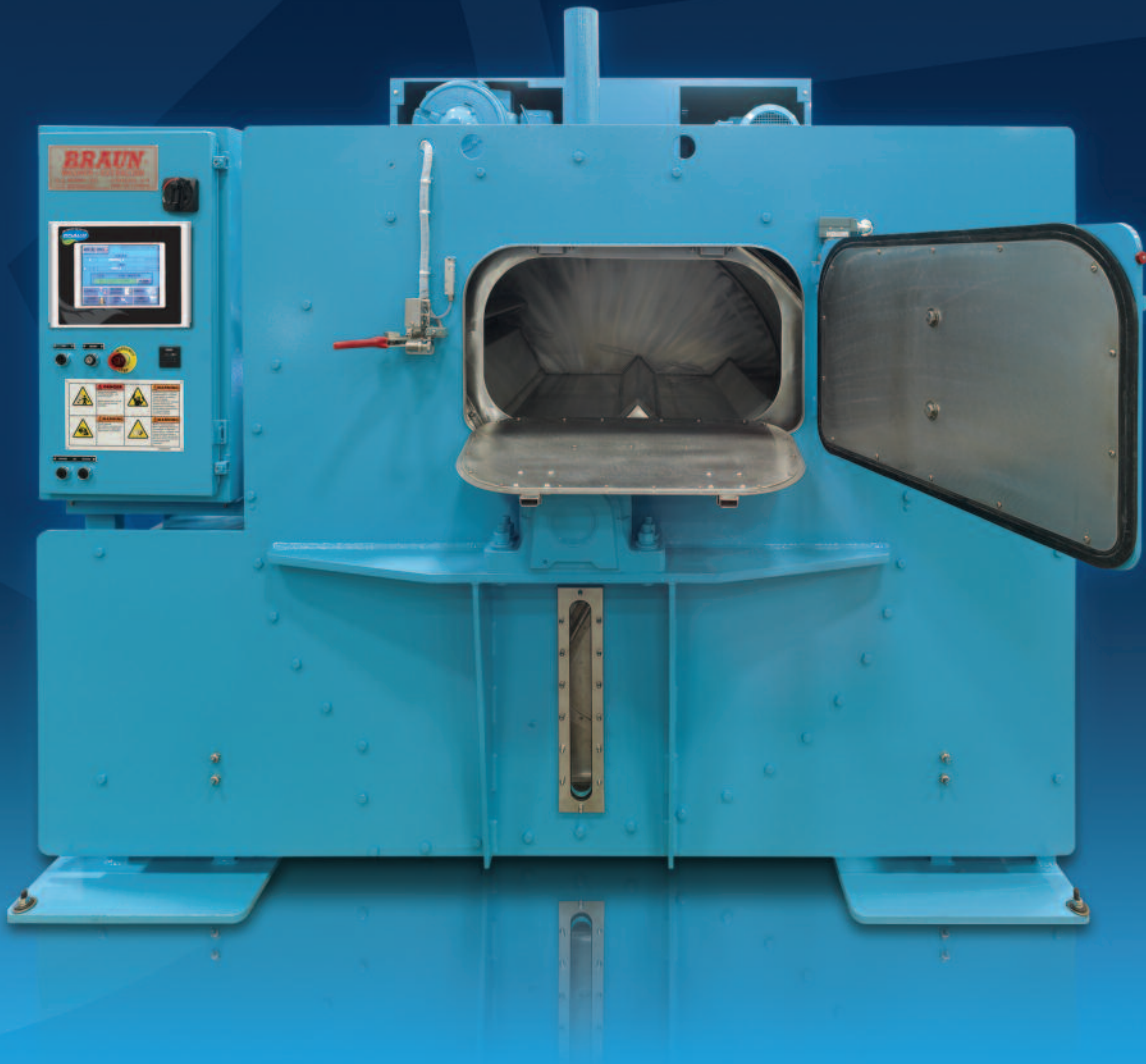

U.S.A.

ISO 9001 Certified

All Braun Products are Proudly
Manufactured in the U.S.A.

gabraun.com

END LOADER

STANDARD MODELS

- Available in processing capacities of 100, 200, 300, and 400 lbs. dry weight load sizes
- Ideal for low ceiling installations and washrooms with limited space
- Strength and durability – the highest quality materials and simple, rugged design make this a truly heavy duty machine. The Braun End Loader will operate for decades
- Thorough wash action and high-speed extraction assure high-quality washing

CONTROL PANEL

Standard on all Braun End Loader machines, touch screen controls are simple, intuitive, easy to use, and control all major machine functions.

AUTOMATIC SAFETY AND AUTO LOAD REBALANCE TECHNOLOGY

Optical sensors on Braun End Loaders will instruct the machines to:

- Automatically shut down if they are out of balance
- Automatically balance loads prior to moving into the extraction phase to evenly distribute wet goods against the cylinder, eliminating the need for artificial counterbalances.



BRAUN'S NEUTRON SUSPENSION

- Unsurpassed vibration dampening allows for installation without a foundation, even on upper floors that can hold the static weight of the machine!
- Isolates vibration from the workspace
- Promotes less wear on major end components for exceptional durability and machine longevity
- Provides for consistent wash performance

Specifications

End Loader Model	Max. Recommended Capacity – Lbs./Kg.	Cylinder Dia. X Depth – Inches/mm	Cylinder Volume – Cubic Ft./Cubic Meters	No. of Pockets	Cylinder Door Area Open for Loading – Sq. Inches/Sq. cm	Hgt. of Unloading Doors Above Floor – Inches/mm	Extract Motor – H.P.	Extract Speed – R.P.M.	Wash Motor – H.P.	Wash Speed – R.P.M.	Balance Motor – H.P.	Drain Valve – Inches	Automatic Inlet Valves – Inches/mm	Steam Valve – Inches/mm	Overall Width w/Dispenser – Inches/mm	Overall Depth w/Dispenser – Inches/mm	Overall Height w/Dispenser – Inches/mm	Approx. Domestic Shipping Wt. (Net) – Lbs./kg. skidded	Approx. Export Shipping Wt. – Lbs./kg.	Export Cubage – Cubic Ft./Cubic Meters
Neutron 100-2	130 59	37 x 34 940 x 864	21.2 .6000	2	236 1523	37.5 953	7.5	660	1	27.2	1	6 152	1 1/4 32	3/4 19	63 1600	64 1625	72 1830	3850 1746	4860 2204	236 6.68
Neutron Medicare 100-3	130 59	37 x 34 940 x 864	21.2 .6000	3	210 1355	37.5 953	7.5	647	1	34	-	6 152	1 1/4 32	3/4 19	80 2032	57 1448	75 1905	6500 2948	7600 3447	272 7.70
Neutron 200-2	230 105	44 x 42 1118 x 1067	36.9 1.045	2	297 1916	37.5 953	10	680	3	31.3	3	6 152	2 51	3/4 19	73 1855	75 1905	73 1855	5720 2594	6850 3107	318 9.01
Neutron 300-3	350 159	54 x 42 1372 x 1067	55.6 1.575	3	420 2710	41.5 1040	15	602	5.4	25	-	6 152	2 51	3/4 19	101 2565	84 2133.6	85 2160	9475 4297	11275 5113	506 14.32
Neutron 400-3	450 204	60 x 44 1524 x 1118	71.9 2.036	3	464 2994	44 1118	20	594	7.5	25	-	8 203	2 51	1 1/4 32	108 2743	88 2235.2	91 2311.4	12780 5796	14500 6576	575 16.28



ISO 9001 CERTIFIED

G.A. Braun, Inc.
79 General Irwin Boulevard
N. Syracuse, NY 13212

Mail to:
P.O. Box 3029
Syracuse, NY 13220-3029

Phone
1-800-432-7286

Fax
(315) 475-4130

Parts Help Desk
1-800-432-7286 X 1

Service Help Desk
1-800-432-7286 X 2



U.S.A.

All Braun Products are Proudly
Manufactured in the U.S.A.